


FTR3 ROTARY SENSOR WITH SHAFT SINGLE OR DUAL-REDUNDANT



*Designed for harsh applications with effective design.
Implementing analogue or CAN bus digital outputs.
Suitable for functional safety applications.*



FTR3 hall technology delivers accurate and reliable position measurement with integrated magnet and shaft minimizing risks related to wear over life and assembly tolerances. Multiple options available to fulfil market requirements.

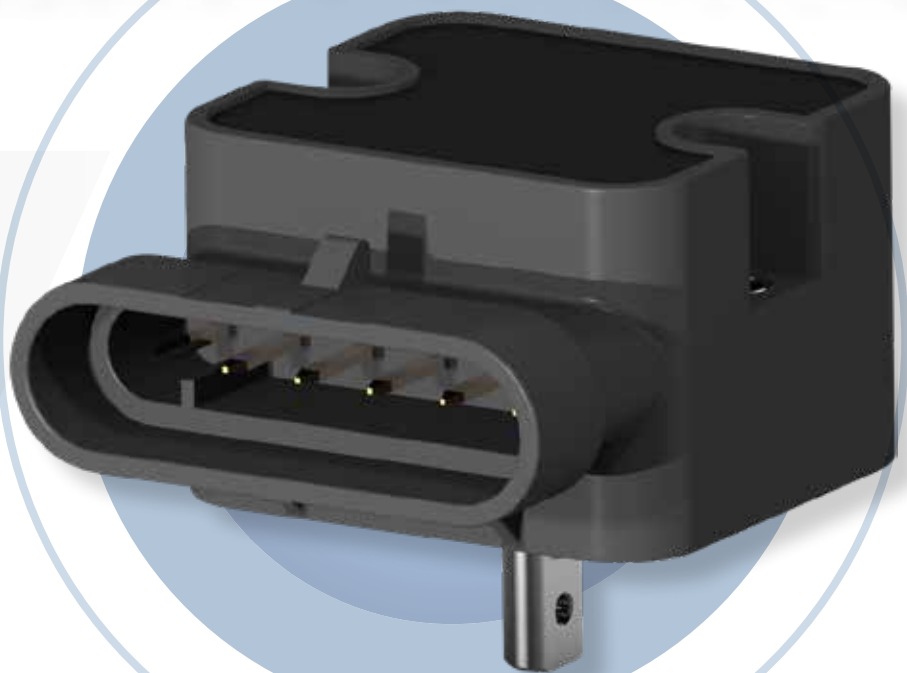

KEY VALUES



Shock proof



3D hall effect technology



CAN open
Digital Out



Up to IP66 and IP68
protection class



Wide temperature
range



Current/voltage
Analogue Out

Description	P/N
FTR3 dual 0-5V	1108238
FTR3 dual CAN	1108236

Default Parameters:

360° full scale

0.5-4.5V or CANopen 406 profile


ID node No.1: 0x1F

ID node No.2: 0x1E (Redundant only)

Baud rate 125kbps (CANbus only)



APPLICATIONS



Material Handling
and Lifting Technology



Agricultural Machinery



Construction Equipment


TECHNICAL DATA

Measurement Range	Settable, up to 360°
Supply voltage	+5Vdc; +9 ...+36Vdc
Output signal	CANbus, 0.5...4.5Vdc, 4...20 mA, 0...10Vdc*
Resolution	up to 14 bit
Independent linearity	±0.3% FS typ
Working temperature	-40°C ... +85°C
Thermal drift	<50ppm/°C
Vibrations	20g between 10 Hz ... 2000 Hz IEC 60068-2-6.
Shock	Pulse on 3 axes; 50g 11 ms IEC 60068-2-27.
Electromagnetic compatibility	2014/30/EU Electromagnetic Compatibility (EMC).
Protections and immunity	Protected against reverse polarity and short circuit
IP Protection Level	IP66, IP68
Housing body	Plastic

All performance data are values resulting from qualification tests on specific configuration sample production batch.
Final product configuration, actual application and respect of installation recommendation may impact on some performance data.
Where not differently indicated, data refer to Tamb condition test environment.


*With limitations. Contact our specialist team for more details.

DIMENSIONS

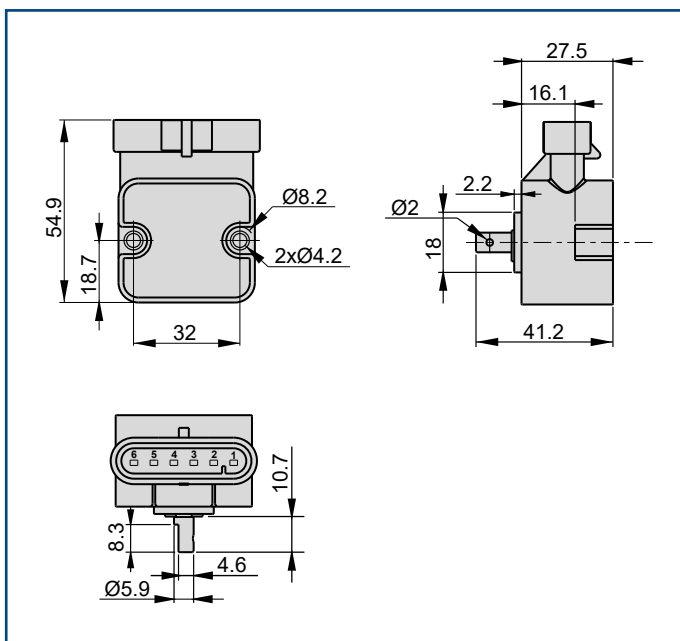

CONNECTOR

N PIN	CANbus	Analogue
1	GND	GND
2	+VIN	+VIN
3	NC	Out 1
4	NC	NC
5	CAN-L	NC
6	CAN-H	Out 2



ORDERING KEY

FAMILY	SUBFAMILY	CASE MATERIAL	CONNECTOR	CHANNEL 1 RANGE (±)	CHANNEL 2 RANGE (±) AND VERSE	SUPPLY VOLTAGE	OUTPUT TYPE	SPECIAL / CUSTOM FEATURE / SW / CUSTOMER	MANUAL ZERO HALL PEN	FACTORY LINEARITY TABLE SUPPLIED	ACCESSORIES / MAGNET TYPE	PROJECT REVISION
ROTATIVE	3 Single turn with shaft "D" Shape	B Plastic with sleeves	6A AMP Seal 6 poles wall mounted	W180 clock wise ±xxx°	0NOT single channel	H 12-24Vdc nominal	001 analogue 0,5-4,5Vdc	000 standard	0 not available (standard)	0 not supplied (standard)	000 not present	1
				C180 counter clock wise ±xxx°	S180 straight degrees	L 5Vdc	002 analogue 0-10Vdc (24V nominal supply Only)				003 FTR3 standard actuation lever	
					C180 crossed degrees			051 CANopen standard				

EXAMPLE OF RESULTING ORDERING CODE

FTR3.B.6A.C180.0NOT.H.001.000.0.0.003.1

Further possibilities available, some options are mutually exclusive, please contact our team for more details.

EXAMPLE OF APPLICATION

