



ELLIPSE

FANALI ANTERIORI - POSTERIORI
FRONT - REAR LAMPS


FULL LED

ISO 13207-1

Compliance



Linea Elettromeccanica | Electromechanical Line





ELLIPSE 12V

FANALI ANTERIORI - POSTERIORI / FRONT - REAR LAMPS

ISO 13207-1
Compliance

SPECIFICHE TECNICHE

Technical specifications

- Lente: metacrilato
 - Alimentazione: 12V
 - Tipo di illuminazione: LED
 - Grado di protezione: IP66 + IP9K
 - Fissaggio: M5
 - Temperatura di funzionamento: - 30° C ÷ + 50° C
 - Omologazione: ECE R6 - R7
 - Compatibilità elettromagnetica (EMC): 2009/64/CE classe 1
- Lens: metacrylate
 - Power supply: 12V
 - Type of lighting: LEDs
 - Sealing degree: IP66 + IP9K
 - Fixing: M5
 - Operating temperature: - 30° C ÷ + 50° C
 - Homologation: ECE R6 - R7
 - Electromagnetic compatibility EMC): 2009/64/CE class 1

Legenda simboli



Icons legend

RH	Destro <i>Right</i>	 REAR	Posizione posteriore <i>Rear position</i>
LH	Sinistro <i>Left</i>	 FRONT	Posizione anteriore <i>Front position</i>
STOP	Stop <i>Brake</i>		Direzione <i>Turn signal</i>



ELLIPSE 12V

FISSAGGIO LATERALE / SIDE FIXING


Fanale anteriore Front lamp

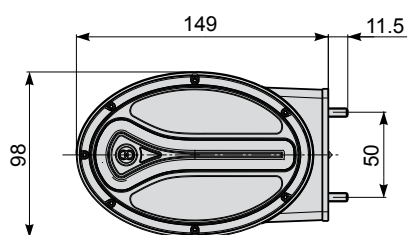

Foratura di applicazione Fixing hole

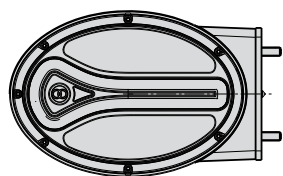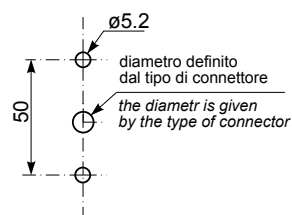

RH

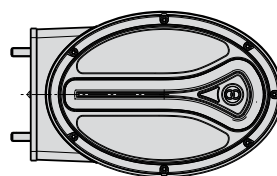

LH



Purchase code Drawing code	Pkg Q.ty	1	1082763 03.0898.0000	1082770 03.09790000	1082774 03.0974.0000	1082785 03.0975.0000	1082789 03.0976.0000	1082795 03.0977.0000
Fanale anteriore Front lamp					x			
RH - LH			x	x				
RH					x			
LH						x		x
Connessione Connection			Superseal 3 pins cable 100 mm	AMP 3 pin terminals cable 100 mm	Superseal 4 pins cable 100 mm	Superseal 4 pins cable 100 mm	Superseal 3 pins cable 100 mm	Superseal 3 pins cable 100 mm
Signature light					x	x		
Assorbimento Consumption					4,5W - Turn signal 1,3W - Signature light 0,8W - Front position			
Peso Weight			300 g					
Corpo Housing					Poliammide Polyamide			
Alimentazione Power supply			12V					

SUPERSEAL 3 vie / 3 pins:

Connettore / Connector
P/N COBO **3009210** (XE0800565)
P/N SUPERSEAL AMP 282105-1
Connettore controparte
Mating connector
P/N COBO **3009202** (XE0800557)
P/N SUPERSEAL AMP 282087-1

OPTIONAL KIT

Connettore controparte
Mating connector
P/N COBO **1028518** (27.0905.0000)

SUPERSEAL 4 vie / 4 pins:

Connettore / Connector
P/N COBO **3009211** (XE0800566)
P/N SUPERSEAL AMP 282106-1
Connettore controparte
Mating connector
P/N COBO **3009203** (XE0800558)
P/N SUPERSEAL AMP 282088-1

OPTIONAL KIT

Connettore controparte
Mating connector
P/N COBO **1028520** (27.0906.0000)

AMP 3 terminali innesto a spina / 3 pin terminals:

P/N COBO **3010651** (XE0900215)
P/N AMP 170002-4
Controparte
Mating
P/N COBO XE0900160






ELLIPSE 12V

FISSAGGIO POSTERIORE / REAR FIXING



Fanale anteriore
Front lamp




Fanale posteriore
Rear lamp

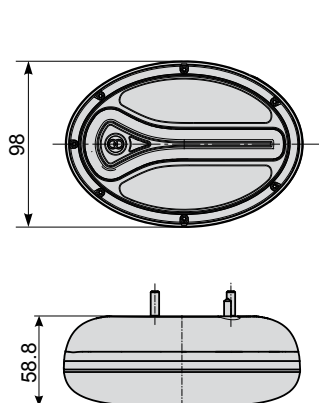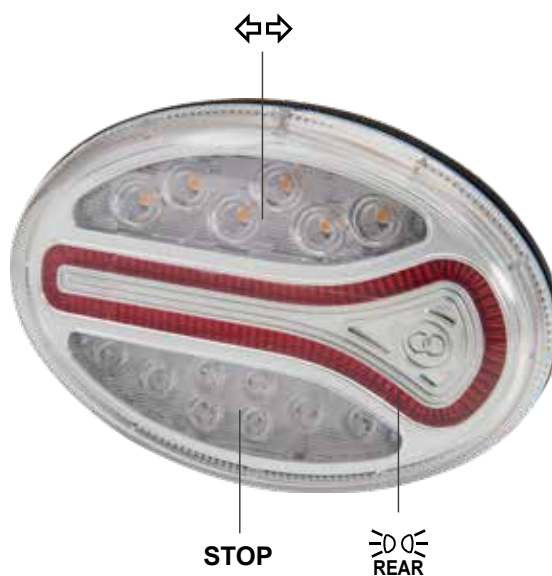

Foratura di applicazione
Fixing hole

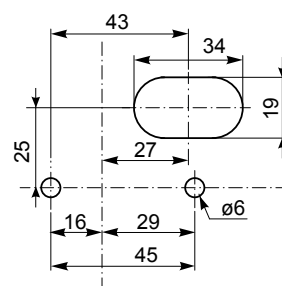

LH



RH



Purchase code Drawing code	Pkg Q.ty	1	1085496 03.0989.0000	1085494 03.0988.0000	1082819 02.1848.0000	1082816 02.1847.0000
Fanale anteriore Front lamp			X			
Fanale posteriore Rear lamp					X	
LH			X		X	
RH				X		X
Connessione Connection			Superseal 4 pins cable 100 mm	Superseal 4 pins cable 100 mm	Superseal 4 pins cable 100 mm	Superseal 4 pins cable 100 mm
Assorbimento Consumption			4,2W - Turn signal 3W- Front position		4,8W - Turn signal 1,8W - Front position 2W - Brake	
Peso Weight			250 g			
Corpo Housing			Poliammide Polyamide			
Alimentazione Power supply			12V			

SUPERSEAL 4 vie / 4 pins:

Connettore / Connector
P/N COBO **3009211** (XE0800566)
P/N SUPERSEAL AMP 282106-1
Connettore controparte
Mating connector
P/N COBO **3009203** (XE0800558)
P/N SUPERSEAL AMP 282088-1

OPTIONAL KIT

Connettore controparte
Mating connector
P/N COBO **1028520** (27.0906.0000)



GERMANY

COBO DEUTSCHLAND GmbH
Zum Schürmannsgraben, 12E
D-47441 - Moers
Germany
Phone: +49 (0) 2841 88238 0
Fax: +49 (0) 2841 88238 23
E-mail: info@cobogroup.net
Web Site: www.cobo-deutschland.com

FRANCE

COBO FRANCE Sarl
Allée de l'Europe, 2 - Zone Coriolis
71210 - Ecuisses
France
Phone: +33 (0) 3 857 30560
Fax: +33 (0) 3 857 85606
E-mail: info@cobogroup.net
Web Site: www.cobofrance.com

NORTH AMERICA

COBO USA Ltd
West Division Street, 304
52655 - West Burlington
Iowa - Usa
Phone: +1 319 754 5585
Fax: +1 319 754 8724
E-mail: info@cobogroup.net
Web Site: www.cobointernational.com

LATIN AMERICA

COBO COMPONENTES AGRICOLAS E INDUSTRIAIS Ltda
Rua Dona Francisca, 8300 - Bloco 9-C
89219-600 Zona Industrial Norte - Joinville
Santa Catarina - Brasil
Phone: +55 47 3305 0095
E-mail: info@cobogroup.net
Web Site: www.cobogroup.net

OCEANIA

COBO OCEANIA Ltd
Maiella Street, 4/12
4207 Stapylton - Brisbane
Queensland - Australia
Phone: +61 (0) 7 3807 4866
Fax: +61 (0) 7 3807 6780
E-mail: info@cobogroup.net
Web Site: www.cobo.com.au

SOUTH-EAST ASIA

COBO ASIA Ltd
Heung Yip Road, 2 - One Island South
622 6/F Unit - Wong Chuk Hang
Hong Kong
Phone: +852 3590 3588
Fax: +852 3590 3566
E-mail: info@cobogroup.net
Web Site: www.cobogroup.net

CHINA

COBO GUANGZHOU Ltd
Qiaotou Street, 226 - Beishan - Haizhu
51000 - Guangzhou
People's Republic of China
Phone: +86 20 8922 5611
Fax: +86 20 8922 5635
E-mail: info@cobogroup.net
Web Site: www.cobochina.cn

INDIA

COBO INDIA Branch Office
Mathura Road, 13/6 - SSR Corporate Park - 2nd floor, 205
121003 NH-2 - Faridabad
Haryana - India
Email: info@cobogroup.net
Web Site: www.cobogroup.net

**HEADQUARTERS****C.O.B.O. SpA**

Via Tito Speri, 10

25024 Leno (Brescia) ITALY

Phone +39 030 90451**Fax** +39 030 9045330info@cobogroup.net | www.cobogroup.net

Le informazioni contenute nella presente informativa hanno scopo puramente indicativo.

L'Azienda si riserva senza preavviso il diritto di apportare qualsiasi modifica tecnica del prodotto.

The information published in this catalogue is purely indicative. The Company reserves the right to introduce all technological changes of the present product at any time and without prior notice.